FIRE EXTINGUISHER CABINET — GENERAL ARRANGEMENT

FOR QUOTATION ONLY — NOT APPROVED FOR FABRICATION

ALL DIMENSIONS IN mm / DO NOT SCALE


3D REFERENCE VIEW / NTS



Original MASTER geometry retained.

Reference glazing: approx. 204 × 484 × 3.

Quotation glazing: 220 × 440 × 2.

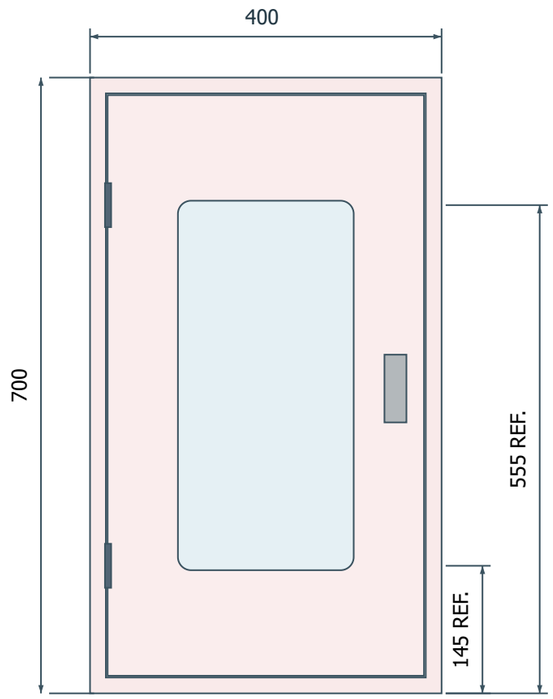


FRONT ELEVATION / NTS

Glazing cutout: 200 × 420, corner R15.


Glass: 220 × 440 × 2, rear-mounted.

Frame opening: 364 × 664 / Door: 360 × 660.

Nominal door clearance: 2 per side, before coating.

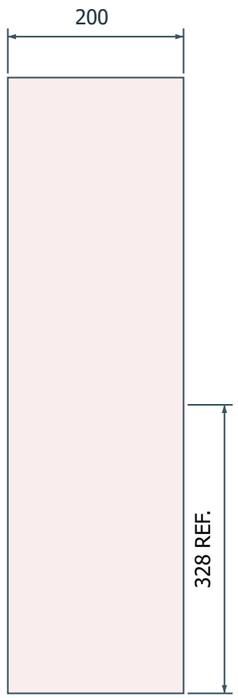

SIDE ELEVATION / NTS

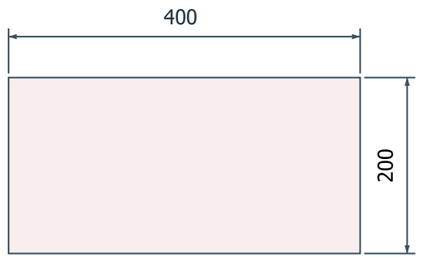

TOP VIEW / NTS

HARDWARE REFERENCES

Hinge / handle heights shown as reference dimensions.

Mounting holes and hinge axis: supplier to verify.

BILL OF MATERIALS — PURCHASED ITEMS FOR ONE CABINET

ITEM	DESCRIPTION / SPECIFICATION	QTY
SPCC Cold-Rolled Steel	1,220 × 2,440 × 0.8; nominal thickness governs	1 Sheet
Clear Glass Panel	220 × 440 × 2; rear-mounted; straight-edge overlap 10	1 Panel
Steel Hinges / Handle with Latch	Left hinges / right handle; selection and mounting to be verified	2 Pcs / 1 Set
Glazing Gasket / Support Strip	Flat strip, t = 1, width 8; outer frame 218 × 438 (preliminary)	1 Set
Glass Retaining Clips, Pads and Fasteners	Design and Quantity to Be Confirmed	1 Set

1. All dimensions are in millimeters unless otherwise specified.
2. SPCC cold-rolled steel, thickness 0.8 mm.
3. Verify bend radius, K-factor and machine tooling before fabrication.
4. Confirm hinge selection, door clearance and swing envelope.
5. Confirm glazing retention method and hardware specifications.
6. Verify weld details and manufacturing tolerances.
7. For quotation purposes only — not approved for fabrication.

PROJECT	MATERIAL	SHEET SIZE / UNITS	REVISION
FIRE EXTINGUISHER CABINET V1	SPCC STEEL, 0.8 mm	A3 LANDSCAPE / mm	P3.2
DRAWING STATUS	**DRAWING NUMBER**	**SCALE**	**SHEET**
FOR QUOTATION ONLY	FEC-V1-GA-001	NTS — DO NOT SCALE	1 OF 3


SHEET METAL FLAT PATTERNS & NESTING PLAN

FOR QUOTATION ONLY — NOT APPROVED FOR FABRICATION

ALL DIMENSIONS IN mm / DO NOT SCALE

ALL PARTS: QTY 1 | t = 0.8 | INSIDE R = 1.0 | K = 0.40 | BEND 90° | BA = 2.073451 | BD = 1.526549

PART 01 — U-Shaped Cabinet Body

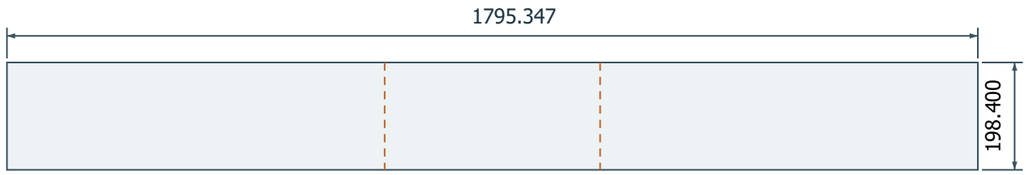

2 bend CLs from left cut edge: 698.437 / 1096.910.

BEND UP 90° — BOTH LEGS TO SAME SIDE.

PART 01 formed: W400 × H699.2 × D198.4 (outside).

Flat = 699.2 + 400 + 699.2 - 2BD = 1795.347.

PART 05 flat W/H = formed W/H + 2(15) - 2BD.

6 bends total: PART 01 = 2; PART 05 = 4; PART 02–04 = 0.


PART 02

Top Cover Panel




400 × 198.4 / NO BENDS

PART 03 — Rear Panel



400 × 700 / NO BENDS

PART 04 — Front Frame




400 × 700

Cutout 364 × 664; border 18.

ONE-PIECE CUT FRAME

PART 05

Four-Sided Flanged Door




386.947×686.947

PART 05: 4 BENDS TO REAR, 90° | Bend CL offset 14.237 | Notches 15.773 × 15.773 (4X), VERIFY.

Centered cutout 200 × 420 R15 | Formed door 360 × 660 × 15 | Hardware holes: supplier to verify.

NESTING PLAN — 2,440 × 1,220 × 0.8 / 1 SHEET

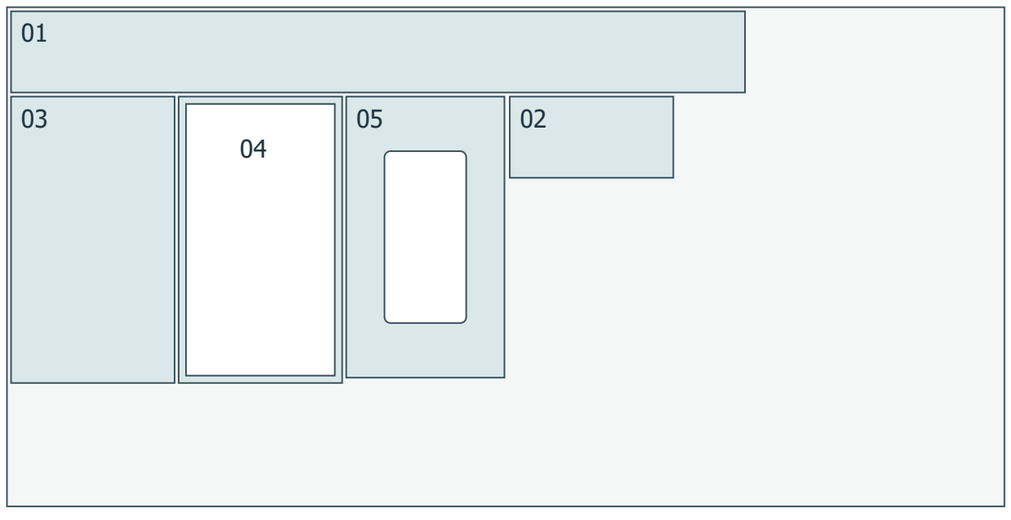

MATERIAL ACCOUNTING

Gross rectangular blank area: 1.261369 m²

Net steel area: 0.934871 m²

Non-product area incl. kerf: 2.041929 m²

Net material utilization: 31.41%

Internal removals: 0.326498 m²; see detail sheet.

Sheet edge margin ≥10; actual minimum blank spacing 10.

Assumed kerf 1; web between two cuts ≥8.

Origins (X,Y): 01 (10,10); 03 (10,218.4); 04 (420,218.4).

05 (830,218.4); 02 (1230,218.4). All in mm.

Verify actual kerf, lead-ins, tabs and clamp clearance.

Parts 01–05 use the listed stock sheet; do not double-count steel.

1. All dimensions are in millimeters unless otherwise specified.
2. SPCC cold-rolled steel, thickness 0.8 mm.
3. Verify bend radius, K-factor and machine tooling before fabrication.
4. Confirm hinge selection, door clearance and swing envelope.
5. Confirm glazing retention method and hardware specifications.
6. Verify weld details and manufacturing tolerances.
7. For quotation purposes only — not approved for fabrication.

PROJECT	MATERIAL	SHEET SIZE / UNITS	REVISION
FIRE EXTINGUISHER CABINET V1	SPCC STEEL, 0.8 mm	A3 LANDSCAPE / mm	P3.2
DRAWING STATUS	DRAWING NUMBER	SCALE	SHEET
FOR QUOTATION ONLY	FEC-V1-FP-002	NTS — DO NOT SCALE	2 OF 3


FABRICATION DETAILS — JOINTS, DOOR & GLAZING

FOR QUOTATION ONLY — NOT APPROVED FOR FABRICATION

ALL DIMENSIONS IN mm / DO NOT SCALE

CONCEPT DETAILS / NTS — SUBJECT TO FABRICATOR VERIFICATION

A — PART 04 / CABINET ASSEMBLY

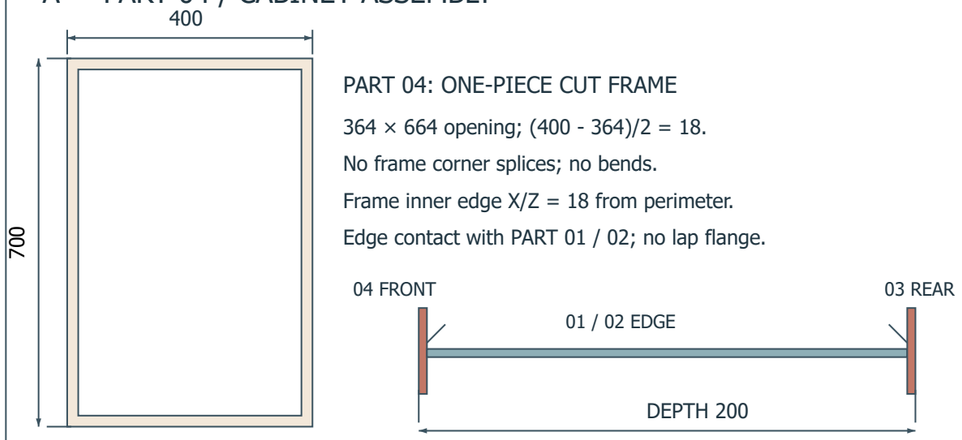

PART 04: ONE-PIECE CUT FRAME

364 × 664 opening; (400 - 364)/2 = 18.


No frame corner splices; no bends.

Frame inner edge X/Z = 18 from perimeter.


Edge contact with PART 01 / 02; no lap flange.

Depth stack: 0.8 + 198.4 + 0.8 = 200.

B — PART 05 / FLANGED EDGE & RELIEF

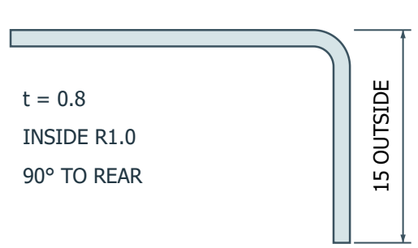

FLAT CORNER / 4X



Square relief:
15.773 × 15.773
CL offset 14.237
from cut edge.

Relief extends 0.5 mm beyond the nominal bend tangent.


360 × 660 door in 364 × 664 opening: nominal gap 2 per side.

Verify relief, bend sequence, tooling access and corner closure.

Hinge axis / fixing REF only; swing and latch interference unverified.

C — REAR-MOUNTED GLASS / EDGE SECTION

200 × 420 R15 aperture / 220 × 440 × 2 glass / overlap 10.

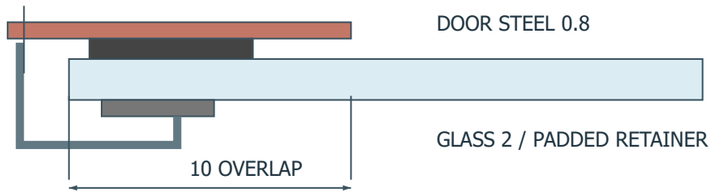

FRONT ABOVE / CABINET INTERIOR BELOW

Gasket concept: t = 1, width 8; outer 218 × 438, inner 202 × 422.

1 nominal edge setback each side of strip on straight edges.

Nominal stack: steel 0.8 + gasket 1 + glass 2 = 3.8 before compression.

Padded clips / lower support: no direct metal-to-glass contact.

Clip count, studs / screws, backing pads and edge finish: VERIFY.

Verify R15 corner coverage, retention load and glass safety type.

Glass grade / safety compliance NOT established. Do not drill glass.

D — JOINTS, OFFCUTS & QUOTATION HOLD POINTS

Assembly datum: X width, Y front-to-rear, Z height; all from outside.

04: Y0–0.8; 01 / 02: Y0.8–199.2; 03: Y199.2–200.

01: Z0–699.2; 02: Z699.2–700. Nominal steel envelope: 400 × 700 × 200 mm.

05: X20–380, Z20–680, Y0–15. Hardware projection is unverified.

Proposed thin-sheet edge welds: 02 to both 01 side edges;

04 / 03 to body perimeter. No overlap / spot-weld flanges provided.

Joint lengths: top 0.3968 m; front 2.2 m; rear 2.2 m (not weld lengths).

Fabricator to select weld process, stitch size / pitch, sequence and finish.

Confirm rounded body corner gaps, distortion, sealing and tolerances.

Potential offcut rectangles after separation cuts (assumed kerf 1):

2420 × 285; 620 × 908; 570 × 485; frame core approx. 362 × 662.

Glazing cutout offcut: approx. 198 × 418 R14; rectangle 198 × 388.

Offcuts are subsets of non-product area; cutting plan must be verified.

Confirm actual kerf, lead-ins, hold-downs, coating allowance and fit.

1. All dimensions are in millimeters unless otherwise specified.
2. SPCC cold-rolled steel, thickness 0.8 mm.
3. Verify bend radius, K-factor and machine tooling before fabrication.
4. Confirm hinge selection, door clearance and swing envelope.
5. Confirm glazing retention method and hardware specifications.
6. Verify weld details and manufacturing tolerances.
7. For quotation purposes only — not approved for fabrication.

PROJECT	MATERIAL	SHEET SIZE / UNITS	REVISION
FIRE EXTINGUISHER CABINET V1	SPCC STEEL, 0.8 mm	A3 LANDSCAPE / mm	P3.2
DRAWING STATUS	DRAWING NUMBER	SCALE	SHEET
FOR QUOTATION ONLY	FEC-V1-DT-003	NTS — DO NOT SCALE	3 OF 3